

Head Office:

ABN: 68 140 091 158

P: 08 8326 6300 | F: 08 8326 4685

E: admin@maxilift.com.au

A: 12-16 Dorset Street, Lonsdale, SA, 5160


W: www.maxilift.com.au

Model – X-046 HiDuo D-4

Technical Specifications	
<ul style="list-style-type: none"> ○ Lifting Moment of 3.7TM ○ Maximum Hydraulic reach 9.1m ○ Maximum Capacity at max reach 330kg ○ Crane Weight of 598kg 	<ul style="list-style-type: none"> ○ Slew Angle of 380° ○ Stabiliser Width of 3700mm ○ Manually Extending Stabilizers ○ 75L Oil Tank – mounted on truck
SPACEevo Control System <ul style="list-style-type: none"> ○ Superb electronic control system packed full of advanced features such as: <ul style="list-style-type: none"> ○ Cabin Protection ○ Ballast Optimization (if required) ○ Automatic Speed Control ○ Automatic Duty Control ○ Data Recording and Logging 	4 Function XSDrive LITE Remote Control <ul style="list-style-type: none"> ○ Safe, precise, and superior control of all crane functions ○ Ultimate control of all features of the crane at the operators' fingertips ○ Electronic Capacity Indicator easily visible for the operator on the remote display ○ Supplied with Hip and Shoulder Straps

**1-Step Variable Stability Logic (VSL)**

The 1-Step VSL system is a proportional stability control system which optimizes the cranes performance based on the stabilizer position. The operator has the option to place the stabilizers at the most optimal position for the working side of the truck and the crane will automatically calculate the capacity accordingly. The capacity will only be varied where it is required, i.e. only the left-hand side of the crane will be de-rated if the left-hand leg is retracted

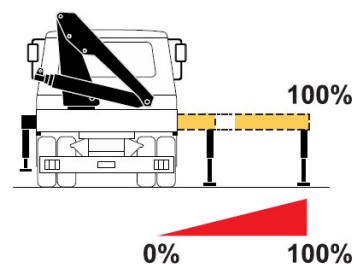

Head Office:

ABN: 68 140 091 158

P: 08 8326 6300 | F: 08 8326 4685

E: admin@maxilift.com.au

A: 12-16 Dorset Street, Lonsdale, SA, 5160

W: www.maxilift.com.au

